

NG75A-DRG  
NG75A-DR



NG75A-DSG  
NG75A-DS



NG75L-DRG  
NG75L-DR



NG75L-DSG  
NG75L-DS



NG75L(K)-DRG  
NG75L(K)-DR



NG75L(K)-DSG  
NG75L(K)-DS



■製品仕様

型式 MODEL	砥石寸法 WHEEL SIZE mm	回転数 FREE SPEED rpm	全長 OVERALL LENGTH mm	重量 WEIGHT kg	空気消費量 AIR CONSUMPTION m <sup>3</sup> /min	ホース内径 AIR HOSE mm PT	
NG65A-DRG/-DSG	65×13×9.5	14600	310/330	1.45/1.35	0.4	9.5	3/8
NG65L-DRG/-DSG	65×13×9.5	14600	370/390	1.6/1.5	0.4	9.5	3/8
NG65LL-DRG/-DSG	65×13×9.5	14600	515/535	1.85/1.75	0.4	9.5	3/8
NG75A-DRG/-DSG	75×13×9.5	12700	310/330	1.6/1.5	0.5	9.5	3/8
NG75L-DRG/-DSG	75×13×9.5	12700	515/535	2.6/2.5	0.5	9.5	3/8
NG75L(K)-DRG/-DSG	75×13×9.5	12700	515/535	2.05/1.95	0.5	9.5	3/8

■NG付属品



NG125A-DRG



NG125A-DSG



NG150A-DRG




NG150A-DSG



■製品仕様

型式 MODEL	砥石寸法 WHEEL SIZE mm	回転数 FREE SPEED rpm	全長 OVERALL LENGTH mm	重量 WEIGHT kg	空気消費量 AIR CONSUMPTION m <sup>3</sup> /min	ホース内径 AIR HOSE mm PT	
NG125A-DRG/DSG	125×19×12.7	7600	395/430	3.1	1.20	12.7	1/2
NG150A-DRG/DSG	150×25×15.9	6300	445/490	4.4	1.25	12.7	1/2

■NG付属品

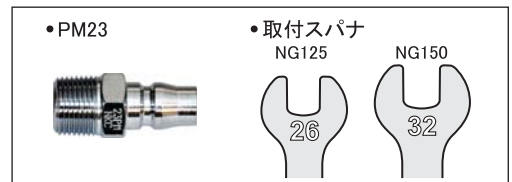

■特注加工事例

NG125A

特注バフ用  
アウターフランジ



取り付けてる先端工具の内径に合わせて部品加工、合わせて先端工具(バフ)にあった回転数に調整。